



MB 18 A



1.8 Ton Mini Excavators



Do it right
with Müller Machinery™

SPECIFICATIONS

Weight Class	1.8
Model	MB 18 A
Emission Standard	Stage V
Operating Weight Doxw	1875
Bucket Digging Force	15
Arm Digging Force	9
Dimensions - Length x Width x Height	3110 x 1100 x 2280
Operator Cabin	Canopy & Cabin
Technical Data - Engine - Brand	Kubota D902 or Laidong KM385B
Counterweight Platform Ground Clearance	3400
Technical Data - Engine - Cooling	Water cooled
Technical Data - Engine - Fuel Type	Diesel
Technical Data - Engine - Number of Cylinders	3
Travel Speed	2
Swing speed	10
Hydraulic System - Flow rate	31.2 + 7.8
Hydraulic System - Pump	Gear pump
Hydraulic System - Hydraulic lines	Continental
Hydraulic System - Valves	Permco Tianjin - Multi Way Valve
Hydraulic System - Swing motor	LKC
Hydraulic System - Travel motor	LKC
Hydraulic System - Hydraulic oil capacity	21
Hydraulic System - Max. working pressure	160 + 30
Working Range - Max. Digging Depth	2170
Working Range - Max. Digging Radius	3470
Working Range - Max. Vertical Digging Depth	2085
Working Range - Max. Dumping Height	2135
Min. Turning Radius	1505
Working Range - Dozer blade (lift / lower)	150 / 290
Track length	1440
Track width	230
Boom swing angle - Left / Right	43 / 48
Dozer Blade - Width / Height	1100 / 200
Bucket Capacity	0.03
Bucket Width	480
Engine Power	18.5
Technical Data - Engine - Torque	56 or 80-120
Working Range - Max. Digging Height	3010
Equipment Options - Closed cabin	No
Equipment Options - Hydraulic-electric joystick control	Yes
Equipment Options - 2 standard buckets	Yes
Equipment Options - Steel tracks	No
Equipment Options - Hydraulic thumb	No
Equipment Options - Air conditioning	No
Equipment Options - Color choice	Yes
Documentation & Compliance	CE certified
Documentation & Compliance - Operator's manual (DE/EN/FR/etc.)	Included
Equipment Options - Side swing boom	Yes
Equipment Options - Adjustable undercarriage	No
Roll Over Protective Structure (ROPS)	ISO 12117-2:2008
Tip Over Protective Structure (TOPS)	ISO 12117:1997
Top Guard	ISO 10262:1998 (Level II)
Operator Sound Pressure	Not Specified ISO 6396:2008
Average Exterior Sound Pressure	Not Specified ISO 6395:2008

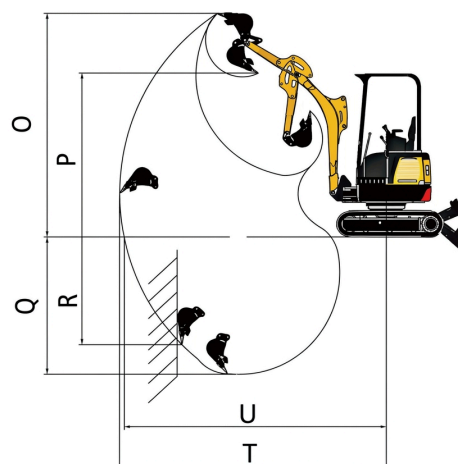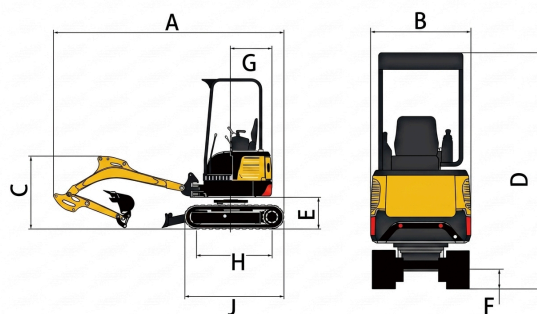

DIMENSIONS

1	Dig Depth
2	Vertical Wall
3	Maximum Reach at Ground Level
4	Maximum Reach
5	Maximum Dig Height
6	Maximum Dump Clearance
7	Boom in Reach
8	Tail Swing with / without Counterweight
9	Maximum Blade Height
10	Maximum Blade Depth
11	Transport Height
12	Cab Height
13	Swing Bearing Height
14	Overall Undercarriage Length
15	Overall Shipping Length
16	Track Belt/Shoe Width
17	Overall Track Width
18	Ground Clearance
19	Stick Length

OPTIONAL EQUIPMENT



Trenching Bucket



Bucket - 40cm



Bucket - 60cm



V-Shaped Bucket



Clamshell Bucket



Tilting Grading Bucket



Toothless Grading Buckets -
80 cm, 100 cm



Thumb Clip



Hydraulic Thumb



Hydraulic Plate Compactor



Hydraulic Hammer



Excavators Rippers



Mechanical Grapppler



Grading Rake



Pallet Forks



Forestry Mulcher



Mechanical Quick Coupler



Hydraulic Quick Coupler



Stump Grinder



Hydraulic Auger Bits

COMPACT POWER FOR REAL-WORLD APPLICATIONS

We design our excavators for maximum performance where space is limited and precision matters. High-performance hydraulics, precise control and optimized weight distribution enable efficient work in gardens, urban areas and construction sites without compromise.

BUILT TO MEET THE HIGHEST STANDARDS

Our machines meet all CE safety requirements as well as Stage V emission standards and undergo global certification. Each model is developed for reliability, efficiency and operator comfort, ensuring long-lasting performance regardless of the job.

READY WHEN YOU ARE

With over 80% of spare parts in stock and fast EU-wide delivery, your machine stays where it belongs — on the job. Our service network ensures fast support, easy maintenance and minimal downtime.

PREMIUM SERVICE FOR YOUR SUCCESS

From first contact to after-sales support, we stand by your side. Individual consulting, transparent documentation and flexible logistics solutions ensure that every machine performs optimally for your business — well beyond delivery.

For more information about products, services and industry solutions from **Müller Machinery**, visit: www.muellermachinery.com

Technical data, illustrations and equipment may be subject to change without prior notice. Images may include optional attachments or accessories. For complete product information and availability, please contact your authorized Müller Machinery representative.

MÜLLER MACHINERY™, the Müller Machinery logo and all related product names are trademarks of Wensday Invest Sp. z o.o. and may not be used without prior written consent.

Trademark operating under: Wensday Invest Sp. z o.o. | Sw. Marcin 29/8 | 61-806 Poznan, Poland | VAT-ID: 7831870813