

Forklift Truck **3t**

C Tailift Serie: **FBD30 Li-Ion**

80 V / 280 Ah

A lithium-ion electric forklift designed for intensive operation and fast turnaround between shifts.



LI-ION
TECHNOLOGY



Full power available immediately



Lower energy and maintenance costs



Fast charging between shifts



*Image for illustrative purposes only. Product specifications may vary depending on the selected configuration.



TECHNICAL SPECIFICATIONS

Model	FBD30 4.800
Rated capacity	3,000 kg
Load centre	500 mm
Maximum lift height (h3)	Triplex mast, 4,800 mm
Side shift	Yes
Free lift height (h5)	945 mm, with load backrest
Load backrest height (h8)	1,220 mm
Fork dimensions, thickness × width × length	45 × 122 × 1,220 mm
Mast tilt, forward × backward (α / β)	6° / 12°
Truck length (L2)	2,745 mm, excluding forks
Overall width (B)	1,280 mm
Lowered mast height (h1)	2,200 mm
Extended mast height (h4)	6,020 mm, with load backrest
Overhead guard height (h6)	2,170 mm
Operator seat height (h7)	1,140 mm
Fork carriage width	1,145 mm
Turning radius (R)	2,450 mm
Front axle to fork face (X)	485 mm
Working aisle width (Ast)	4,135 mm, with 800 × 1,000 mm pallet, lengthwise
Working aisle width (Ast)	4,235 mm, with 800 × 1,200 mm pallet, lengthwise
Travel speed, laden / unladen	11 / 13 km/h
Lifting speed, laden / unladen	250 / 330 mm/s
Lowering speed, laden / unladen	370 / 440 mm/s
Drawbar pull, laden / unladen	14,000 kN
Maximum gradeability, laden	15%
Service weight	4,695 kg
Tyre size, front / rear	28 × 9 × 15, 14PR / 6.50 × 10, 10PR
Wheelbase	1,700 mm
Ground clearance, lowest point / centre	110 mm / 220 mm

DISCOVER C-TAILIFT LI-ION POWER

Less downtime. More work. Clean power ready for the next shift.

C-Tailift electric forklift trucks with lithium-ion batteries are designed for intensive operation in warehouses, logistics centres, manufacturing facilities and other environments where quiet operation, **excellent manoeuvrability and rapid equipment turnaround** are essential.

The advanced Li-ion drive system provides **smooth travel, high efficiency** and convenient everyday operation. The lithium-ion battery supports fast opportunity charging between tasks, **reduces downtime and simplifies multi-shift operation**.

The truck design supports **operator safety and comfort**. Excellent visibility, an ergonomic workstation, a suspension seat, LED lighting and, also - in newer models - a camera assisting with manoeuvring, together with a stable chassis, help ensure **precise load handling** and improved **awareness of the surrounding area**.


Zero exhaust emissions, low noise levels, reduced vibration and lower maintenance requirements make the truck well suited for indoor use and **for applications where clean, safe and efficient operation is essential**.

EQUIPMENT

- Li-ion battery with BMS and charger
- Design providing a wide field of view
- Three-function hydraulic system with control levers
- Multifunction instrument display
- Suspension seat with safety belt
- Adjustable steering column
- Front and rear LED lighting
- Rear assist handle with horn button
- Anti-slip access step
- Operator's manual and technical documentation

DRIVE AND MOTOR PARAMETERS

Capacity class	3 t
Motor brand	EIKTO
Motor model	SUPEREC
Traction motor	10 kW
Hydraulic motor	12 kW
Battery voltage	80 V
Battery capacity	280 Ah
Charger output current	150 A

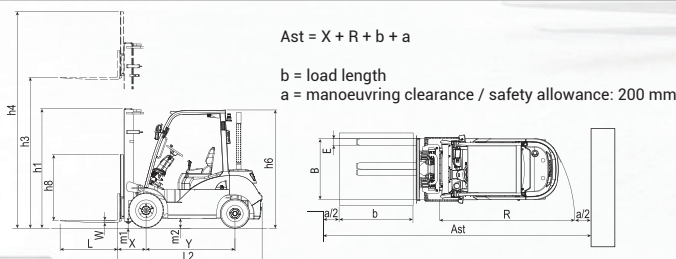

Tailift
MATERIAL HANDLING TAIWAN CO. LTD.
TOYOTA INDUSTRIES GROUP

This data sheet has been prepared with reference to the offered forklift truck configuration and is intended as supplementary information to the commercial offer. The technical parameters correspond to the configuration specified in the offer; however, selected values may change depending on the final equipment, attachments used, manufacturer updates or individual technical arrangements. The stated data are nominal values and may vary within the tolerances resulting from the machine design, drive system, working systems and typical operating conditions. In the event of any discrepancy, the commercial offer, final technical specification and manufacturer's documentation shall prevail.

MODEL FEATURES

EVERY DETAIL MATTERS

Discover solutions designed to improve operator comfort, safety and productivity in warehouses and manufacturing facilities.




PERFORMANCE IN ALL CONDITIONS

Whether operating in sunshine, rain, indoors or outdoors, the truck delivers stable and continuous performance. The vehicle successfully completed a 15-minute IPX4 rain-resistance test while energised, maintaining full functionality.

REINFORCED CHASSIS

Structural durability is supported by a bolt-free frame design. The chassis has been engineered with safety in mind, while the integrated heavy-duty frame provides improved operator protection during load handling.

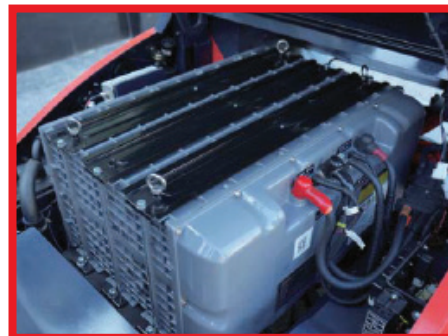


LI-ION TECHNOLOGY

The lithium-ion battery supports fast opportunity charging, reduces daily maintenance requirements and helps lower operating costs.



LED LIGHTING

High-performance LED lighting improves visibility during operation, consumes less energy and offers a longer service life.



EXCELLENT VISIBILITY

The carefully designed mast, overhead guard and rear section of the truck improve all-round visibility and support precise manoeuvring.



REVERSE DRIVING FEATURES

The rear assist handle with horn button and LED indicators supports safer reversing and manoeuvring in confined spaces.



OPTIONAL: COLLISION WARNING SYSTEM

The system alerts the operator and nearby personnel when a pedestrian enters the hazard zone. It helps improve workplace safety in warehouse environments.



SUSPENSION SEAT

The suspension seat with safety belt improves operator comfort and helps reduce fatigue during extended working periods.




ANTI-SLIP ACCESS STEP

The perforated access step improves safety when entering and leaving the truck, particularly on wet or dirty surfaces.




ERGONOMIC STEERING COLUMN

The adjustable steering column allows the workstation to be adapted to the operator and supports comfortable truck operation.



CONCEALED TILT CYLINDERS

The internal positioning of the tilt cylinders reduces the risk of damage, improves access to the working area and contributes to a cleaner overall design.



CLEAR INSTRUMENT DISPLAY

The display provides the operator with key operating information, including battery status and the truck's basic functions.

