



MB 40 A




4 Ton Mini Excavators



Do it right
with Müller Machinery™

SPECIFICATIONS

Weight Class	4
Model	MB 40 A
Emission Standard	Stage V
Operating Weight Doxx	4000
Bucket Digging Force	30
Arm Digging Force	18
Dimensions - Length x Width x Height	4800 x 1740 x 2480
Operator Cabin	Canopy & Cabin
Technical Data - Engine - Brand	Yanmar 3TNV88F
Engine Power	18.2
Technical Data - Engine - Torque	Not Specified
Technical Data - Engine - Cooling	Water cooled
Technical Data - Engine - Fuel Type	Diesel
Technical Data - Engine - Number of Cylinders	3
Hydraulic System - Flow rate	Not Specified
Hydraulic System - Hydraulic lines	Continental
Hydraulic System - Hydraulic oil capacity	50
Hydraulic System - Pump	Variable Plunger Pump
Hydraulic System - Max. working pressure	Not Specified
Hydraulic System - Valves	Hengli
Hydraulic System - Swing motor	Hengli Plunger Motor
Hydraulic System - Travel motor	Eddie - Kawasaki Plunger Motor
Working Range - Max. Digging Height	4920
Working Range - Max. Digging Radius	5260
Working Range - Max. Dumping Height	3490
Working Range - Dozer blade (lift / lower)	400 / 370
Dozer Blade - Width / Height	1740 / 300
Working Range - Max. Vertical Digging Depth	2630
Track width	350
Min. Turning Radius	2125
Equipment Options - Side swing boom	Yes
Track length	2155
Bucket Width	700
Documentation & Compliance	CE certified
Boom swing angle - Left / Right	67 / 45
Bucket Capacity	0.12
Equipment Options - 2 standard buckets	Yes
Equipment Options - Closed cabin	Yes
Equipment Options - Hydraulic thumb	No
Equipment Options - Adjustable undercarriage	No
Documentation & Compliance - Operator's manual (DE/EN/FR/etc.)	Included
Equipment Options - Steel tracks	No
Equipment Options - Air conditioning	Yes
Counterweight Platform Ground Clearance	655
Travel Speed	2.7
Swing speed	9.5
Working Range - Max. Digging Depth	3165
Equipment Options - Color choice	Yes
Equipment Options - Hydraulic-electric joystick control	Yes
Roll Over Protective Structure (ROPS)	ISO 12117-2:2008
Tip Over Protective Structure (TOPS)	ISO 12117:1997
Top Guard	ISO 10262:1998 (Level II)
Operator Sound Pressure	Not Specified ISO 6396:2008
Average Exterior Sound Pressure	Not Specified ISO 6395:2008

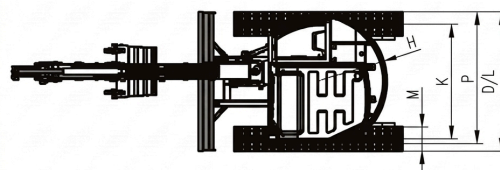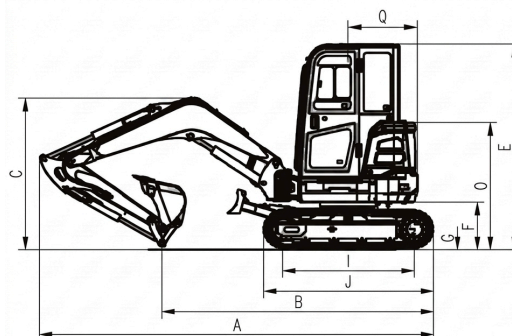

DIMENSIONS

- 1 Dig Depth
- 2 Vertical Wall
- 3 Maximum Reach at Ground Level
- 4 Maximum Reach
- 5 Maximum Dig Height
- 6 Maximum Dump Clearance
- 7 Boom in Reach
- 8 Tail Swing with / without Counterweight
- 9 Maximum Blade Height
- 10 Maximum Blade Depth
- 11 Transport Height
- 12 Cab Height
- 13 Swing Bearing Height
- 14 Overall Undercarriage Length
- 15 Overall Shipping Length
- 16 Track Belt/Shoe Width
- 17 Overall Track Width
- 18 Ground Clearance
- 19 Stick Length

OPTIONAL EQUIPMENT



Trenching Bucket



Bucket - 40cm



Bucket - 60cm



V-Shaped Bucket



Clamshell Bucket



Tilting Grading Bucket


Toothless Grading Buckets -
80 cm, 100 cm


Thumb Clip



Hydraulic Thumb



Hydraulic Plate Compactor



Hydraulic Hammer



Excavators Rippers



Mechanical Grapppler



Grading Rake



Pallet Forks



Forestry Mulcher



Mechanical Quick Coupler



Hydraulic Quick Coupler



Stump Grinder



Hydraulic Auger Bits

COMPACT POWER FOR REAL-WORLD APPLICATIONS

We design our excavators for maximum performance where space is limited and precision matters. High-performance hydraulics, precise control and optimized weight distribution enable efficient work in gardens, urban areas and construction sites without compromise.

BUILT TO MEET THE HIGHEST STANDARDS

Our machines meet all CE safety requirements as well as Stage V emission standards and undergo global certification. Each model is developed for reliability, efficiency and operator comfort, ensuring long-lasting performance regardless of the job.

READY WHEN YOU ARE

With over 80% of spare parts in stock and fast EU-wide delivery, your machine stays where it belongs — on the job. Our service network ensures fast support, easy maintenance and minimal downtime.

PREMIUM SERVICE FOR YOUR SUCCESS

From first contact to after-sales support, we stand by your side. Individual consulting, transparent documentation and flexible logistics solutions ensure that every machine performs optimally for your business — well beyond delivery.

For more information about products, services and industry solutions from **Müller Machinery**, visit: www.muellermachinery.com

Technical data, illustrations and equipment may be subject to change without prior notice. Images may include optional attachments or accessories. For complete product information and availability, please contact your authorized Müller Machinery representative.

MÜLLER MACHINERY™, the Müller Machinery logo and all related product names are trademarks of Wensday Invest Sp. z o.o. and may not be used without prior written consent.

Trademark operating under: Wensday Invest Sp. z o.o. | Sw. Marcin 29/8 | 61-806 Poznan, Poland | VAT-ID: 7831870813