



MB 30



2.6 Ton Mini Excavators



Do it right
with Müller Machinery™

SPECIFICATIONS

Weight Class		
Model		MB 30
Emission Standard		Stage V
Operating Weight Doxw		3075
Bucket Digging Force		22
Arm Digging Force		12
Dimensions - Length x Width x Height		4348 x 1350 x 2156
Operator Cabin		Canopy & Cabin
Technical Data - Engine - Brand		Kubota V1505
Counterweight Platform Ground Clearance		550
Technical Data - Engine - Cooling		Water cooled
Technical Data - Engine - Fuel Type		Diesel
Technical Data - Engine - Number of Cylinders		4
Travel Speed		3.4
Swing speed		9
Hydraulic System - Flow rate		70
Hydraulic System - Pump		Axial Piston Pump
Hydraulic System - Hydraulic lines		Continental
Hydraulic System - Valves		Taifeng - Multi Way Valve
Hydraulic System - Swing motor		Danfoss
Hydraulic System - Travel motor		Eaton
Hydraulic System - Hydraulic oil capacity		28
Working Range - Max. Digging Depth		3058
Working Range - Max. Digging Height		3445
Working Range - Max. Digging Radius		5486
Working Range - Max. Vertical Digging Depth		1832
Working Range - Max. Dumping Height		2203
Min. Turning Radius		2552
Working Range - Dozer blade (lift / lower)		280 / 300
Track width		230
Boom swing angle - Left / Right		45 / 55
Dozer Blade - Width / Height		1350 / 280
Bucket Capacity		0.075
Bucket Width		520
Engine Power		18.5
Technical Data - Engine - Torque		92.6 or 156-157
Hydraulic System - Max. working pressure		210
Track length		2100
Equipment Options - Adjustable undercarriage		No
Equipment Options - Hydraulic-electric joystick control		Yes
Equipment Options - 2 standard buckets		Yes
Equipment Options - Steel tracks		No
Equipment Options - Hydraulic thumb		No
Equipment Options - Air conditioning		No
Equipment Options - Color choice		Yes
Documentation & Compliance		CE certified
Documentation & Compliance - Operator's manual (DE/EN/FR/etc.)		Included
Equipment Options - Side swing boom		Yes
Equipment Options - Closed cabin		Yes
Roll Over Protective Structure (ROPS)		ISO 12117-2:2008
Tip Over Protective Structure (TOPS)		ISO 12117:1997
Top Guard		ISO 10262:1998 (Level II)
Operator Sound Pressure		72 dB(A) ISO 6396:2008
Average Exterior Sound Pressure		99 dB(A) ISO 6395:2008

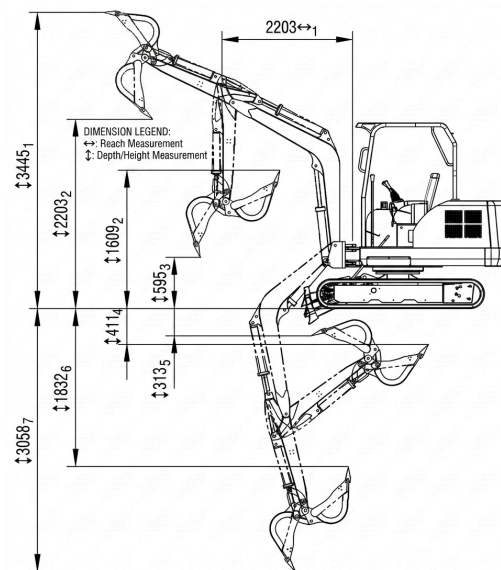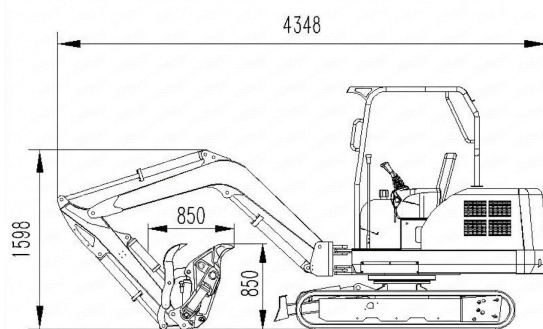

DIMENSIONS

- 1 Dig Depth
- 2 Vertical Wall
- 3 Maximum Reach at Ground Level
- 4 Maximum Reach
- 5 Maximum Dig Height
- 6 Maximum Dump Clearance
- 7 Boom in Reach
- 8 Tail Swing with / without Counterweight
- 9 Maximum Blade Height
- 10 Maximum Blade Depth
- 11 Transport Height
- 12 Cab Height
- 13 Swing Bearing Height
- 14 Overall Undercarriage Length
- 15 Overall Shipping Length
- 16 Track Belt/Shoe Width
- 17 Overall Track Width
- 18 Ground Clearance
- 19 Stick Length

OPTIONAL EQUIPMENT



Trenching Bucket



Bucket - 40cm



Bucket - 60cm



V-Shaped Bucket



Clamshell Bucket



Tilting Grading Bucket


Toothless Grading Buckets -
80 cm, 100 cm


Thumb Clip



Hydraulic Thumb



Hydraulic Plate Compactor



Hydraulic Hammer



Excavators Rippers



Mechanical Grapppler



Grading Rake



Pallet Forks



Forestry Mulcher



Mechanical Quick Coupler



Hydraulic Quick Coupler



Stump Grinder



Hydraulic Auger Bits

COMPACT POWER FOR REAL-WORLD APPLICATIONS

We design our excavators for maximum performance where space is limited and precision matters. High-performance hydraulics, precise control and optimized weight distribution enable efficient work in gardens, urban areas and construction sites without compromise.

BUILT TO MEET THE HIGHEST STANDARDS

Our machines meet all CE safety requirements as well as Stage V emission standards and undergo global certification. Each model is developed for reliability, efficiency and operator comfort, ensuring long-lasting performance regardless of the job.

READY WHEN YOU ARE

With over 80% of spare parts in stock and fast EU-wide delivery, your machine stays where it belongs — on the job. Our service network ensures fast support, easy maintenance and minimal downtime.

PREMIUM SERVICE FOR YOUR SUCCESS

From first contact to after-sales support, we stand by your side. Individual consulting, transparent documentation and flexible logistics solutions ensure that every machine performs optimally for your business — well beyond delivery.

For more information about products, services and industry solutions from **Müller Machinery**, visit: www.muellermachinery.com

Technical data, illustrations and equipment may be subject to change without prior notice. Images may include optional attachments or accessories. For complete product information and availability, please contact your authorized Müller Machinery representative.

MÜLLER MACHINERY™, the Müller Machinery logo and all related product names are trademarks of Wensday Invest Sp. z o.o. and may not be used without prior written consent.

Trademark operating under: Wensday Invest Sp. z o.o. | Sw. Marcin 29/8 | 61-806 Poznan, Poland | VAT-ID: 7831870813